
BOXI towers





www.deprojectinrichter.com 088 - 650 12 34



FEATURES

- 2 widths 360 mm, 420 mm;
- 2 depths: 800 mm (for single desks), 820 mm (for bench desks);
- 3 heights: 740 mm, 1090 mm, 1200 mm;
- Different inner combinations.

TECHNICAL INFORMATION

Carcass

- · Made of 16 mm MFC (melamine) with 1 mm edging;
- Made of 18 mm MFC (melamine) with 1 mm edging;
- Made of 25 mm MFC (melamine) with 2 mm edging (only for H=740 mm top and H=1090 mm middle top).



Handle type (colour + handle code)

Pull-out drawer

- Made of 18 mm MFC (melamine) with 1 mm edging (except file tower, and towers which are 360 mm width, there are parts which are made of 16 mm MFC (melamine));
- Soft closing function;
- Lockable;
- Load max. 50 kg;
- Plastic pen holder is integrated in the upper shelf (TBR/TBL201-202, TBR/TBL307-308).

Legs

- Four plastic height levelling feet, H=23 mm (+10 mm);
- 1 castor Ø80 mm (tread from thermoplastic rubber, non-marking).

Sliding doors (TBR/TBL303-304)

- Made of 10 mm plywood with laminate, edges lacquered;
- No handles (just cut-outs);
- White plastic slide profile.

Inner file drawers (TBR/TBL309-310)

- Made of 12 mm MFC (melamine) with 1 mm edging;
- Full extension ball bearing slides, which are visible;
- Height 280 mm, depth 350 mm, width 646 mm;
- Convenient opening without handles.







Inner personal drawers (TBR/TBL311-316)

- Made of 12 mm MFC (melamine) with 1 mm edging;
- Full extension ball bearing slides, which are visible;
- Height 120 mm, depth 300 mm, width 450 mm;
- Convenient opening without handles.



Fixed metal shelves (TBR/TBL309-316)

- Made of 1 mm thick steel sheet;
- Powder coated metal:
- Fixed with screws.



GUARANTEE

• 5 years

USB fast charger (TBR/TBL313-314)

- A+C Twin USB Fast Charger integrated into the back panel of the cabinet;
- Hardwired power cord to GST18-3 800 mm;
- Cable length: 3 m;
- Dimensions: Ø74x50 mm;
- Cable standard: UK, EU, CH, FR, US;
- R letter means that if the port is damaged, you can change it without replacing the whole socket;
- Black plastic.

Power socket (TBR/TBL315-316)

- 1 AC power socket 100 230 V;
- Hardwired power cord to GST18-3 800 mm;
- Cable length: 3 m;
- Dimensions: Ø74x50 mm, hole for socket Ø60 mm;
- Power socket standards: UK, EU, CH, FR, US;
- Black plastic.

Hook for clothes

- Dimensions: 20x28, H=62 mm;
- Powder coated metal;
- Fixed with screws.


Felt-lined inserts

- For towers with metal shelves;
- 2 sizes: 671x198x2 mm, 450x343x2 mm;
- Suitable with ERA, LUCIA, VELITO PRESTO, SYNERGY;
- Optional, need to be ordered separately.

MATERIALS

- Fabric: ERA, LUCIA, SYNERGY, VELITO PRESTO;
- Melamine (combinations available): P (birch), T (beech),
 D1 (whitened oak), D2 (amber oak), M1 (white), N (grey), U (walnut), N1 (dark grey);
- HPL*: H12 (grey), H13 (cappuccino), H14 (light yellow), H15 (mint colour), H70 (white);
- Metal: E (white), M (metallic), T1 (dark grey), A (black).


RANGE



D = 800 / 820 mm

^{*}Only for doors.

narbutas

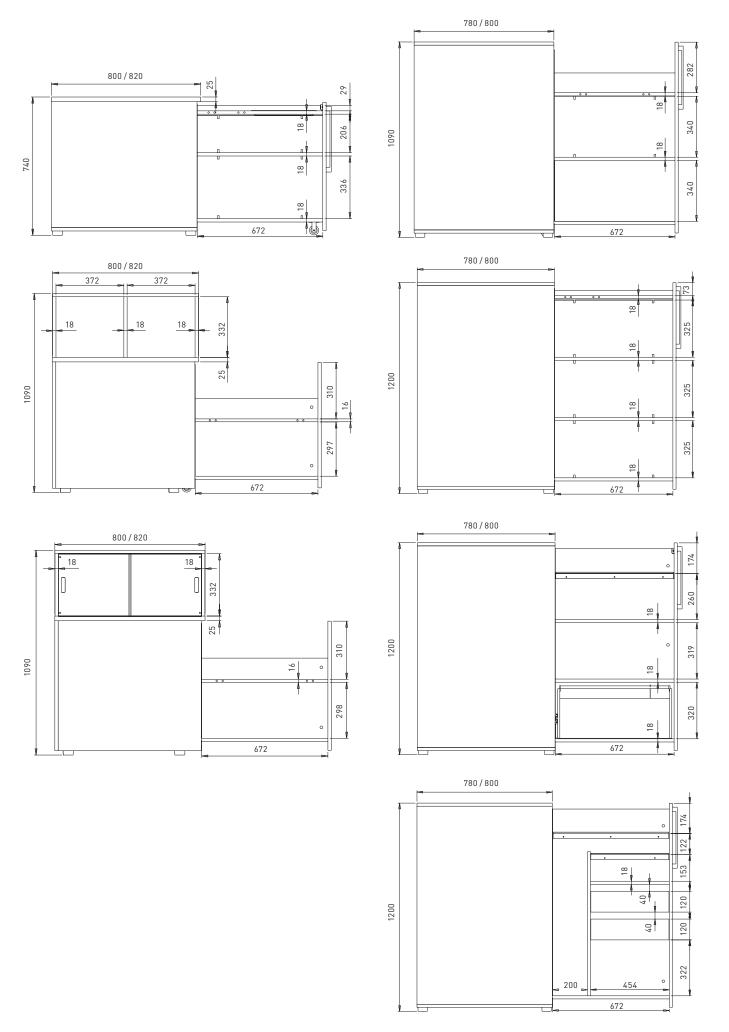




Optional Planter box Bookcase Drawer's box Felt-lined inserts Metal shelves (right / central) Metal hook for clothes Removal key Cylinder lock with 2 keys


ADDITIONAL INFORMATION




- Bookcase or plant box fixing. For fixing bookcase or plant box onto the tower please use stickers and follow the assembly scheme (included in the package).
- Planter box care. Please note that the inner part of planter box is not protected from the moisture. We recommend you to use the Melamine Cleaning and Care Instructions.
- Changing tower sides. You can switch
 the inner wall side from R/H to L/H
 or vice versa for universal towers TBU301-302 and towers assembled
 as R/H or L/H TBR/TBL201-202,
 TBR/TBL307-308. Please use the
 special fittings and follow the assembly scheme (included in the package).

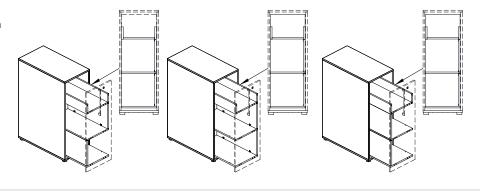

USB port/power socket cable management.





Open



Accessories fixing position.

C0Z062 fixing position:



^{*} If you decide to switch sides from right or left, you will have to reassemble the shelves.

• C0Z063 fixing position:



TBR/TBL201-202



TBU301-302



TBR/TBL307-308*



TBR/TBL309-310

ZZZ061 fixing position:



TBR/TBL311-315

ZTZ005 fixing position:



TBR/TBL201-202



TBR/TBL302-304



TBU301-302

^{*} If you decide to switch sides from right or left, you will have to reassemble the shelves.