

TECHNICAL INFORMATION

1561 GLOSS


TECHNICAL SPECIFICATIONS ACCORDING TO EN 1307

| | | | |
|--------------------------|---------------------------------|--------------|------------------------------|
| constructie | <i>construction</i> | ISO 2424 | 1/10" level loop pile |
| poolmateriaal | <i>yarn content</i> | ISO 2424 | 100% PA 6 |
| rug | <i>backing</i> | ISO 2424 | Ceneva® Actionbac® |
| gebruiksklasse | <i>suitability</i> | EN 1307 | 23 / 32 medium contract use |
| poolgewicht | <i>pile weight</i> | ISO 2424 | 660 gr/m ² |
| totaal gewicht | <i>total weight</i> | ISO 8543 | 1460 gr/m ² |
| pooldikte | <i>pile height</i> | ISO 1766 | 2.8 mm |
| totaal dikte | <i>total thickness</i> | ISO 1765 | 5.1 mm |
| noppental | <i>tuft density</i> | ISO 1763 | 262,000 tufts/m ² |
| breedte | <i>width</i> | CEN/TS 14159 | ca. 4 m |
| warmte-doorlaatweerstand | <i>thermal resistance</i> | ISO 8302 | 0.10 m ² K/W |
| brandklasse | <i>flammability</i> | ISO 13501-1 | Bfl-S1 |
| structure | <i>Konstruktion</i> | ISO 2424 | 1/10" level loop pile |
| composition | <i>Polmaterial</i> | ISO 2424 | 100% PA 6 |
| dossier | <i>Beschichtung</i> | ISO 2424 | Ceneva® Actionbac® |
| classement d'usage | <i>Zusatzeignung</i> | EN 1307 | 23 / 32 medium contract use |
| poids de velours | <i>Poleinsatzgewicht</i> | ISO 2424 | 660 gr/m ² |
| poids total | <i>Gesamtgewicht</i> | ISO 8543 | 1460 gr/m ² |
| hauteur du velours | <i>Polschichtdicke</i> | ISO 1766 | 2.8 mm |
| épaisseur totale | <i>Gesamtdicke</i> | ISO 1765 | 5.1 mm |
| densité | <i>Noppenzahl</i> | ISO 1763 | 262,000 tufts/m ² |
| dimensions | <i>Breite</i> | CEN/TS 14159 | ca. 4 m |
| résistance thermique | <i>Wärmedurchlasswiderstand</i> | ISO 8302 | 0.10 m ² K/W |
| comportement au feu | <i>Brandverhalten</i> | ISO 13501-1 | Bfl-S1 |

COLOURS

| | | | |
|-------------|---------------|-----------------|--------------|
| 122 Phospor | 141 Turquoise | 151 Aqua | 188 Amethyst |
| 123 Copper | 142 Bonze | 154 Gold | 189 Iron |
| 133 Nickel | 144 Patina | 155 Garnet | 199 Bauxite |
| 134 Sulfur | 145 Flame | 173 Tiger's eye | |
| 139 Silver | 149 Mercury | 181 Cerulean | |

PRODIS RATING AND INFORMATION

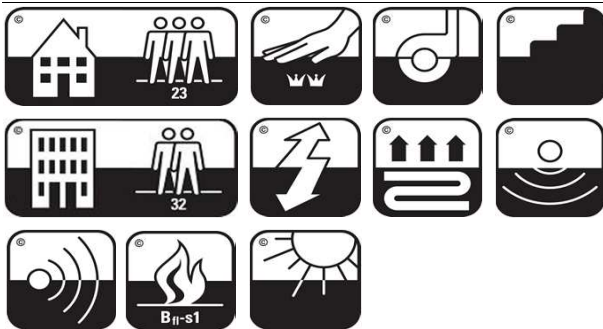

PRODIS: AE7FE9F7
DOP: 1025-117540
abZ: Z-156.601-1273



CONTACT INFORMATION

De Projectinrichter

www.deprojectinrichter.com
088 - 650 12 34

geproduceerd door / manufactured by
fabriqué par / hergestellt durch

edelgroup®
since 1918

Alle technische specificaties zijn onderhevig aan productietoleranties. Voor alle voorwaarden en onderhoudsadvies verwijzen wij u graag naar onze website.

All specifications are subject to normal manufacturing tolerances. For all Terms & Conditions, care and maintenance, please visit our website.

Toutes les spécifications techniques sont sujet aux tolérances de fabrication. Merci de consulter notre website pour toutes informations et les conseils d'entretien.

Alle technische Daten unterliegen Produktionstoleranzen. Bedingungen und Pflegeempfehlungen finden Sie auf unserer Website.